

U.S. Headquarters


Tiger-Vac Inc.
11 SW 12th Ave #112
Dania, FL 33004
USA

Tel: 1-800-668-4437 (954-925-3625)
Fax: 1-800-668-4439 (954-925-3626)
Website: <http://www.tiger-vac.com>
Email: sales@tiger-vac.com

International Headquarters

Tiger-Vac International Inc.
2020 Dagenais Blvd. Ouest
Laval, Quebec
Canada H7L 5W2

Tel: (450-625-0099)
Fax: (450-625-3388)
Website: <http://www.tiger-vac.com>
Email: sales@tiger-vac.com

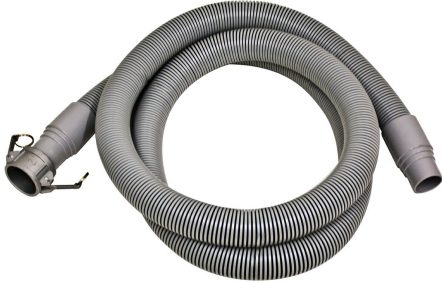

Specifications For SUCTION AND AIR SUPPLY HOSE ASSEMBLIES

Please note that specifications are subject to change without notice

Technical Sheet For SUCTION AND AIR SUPPLY HOSE ASSEMBLIES

Ø1.5" PVC CRUSHPROOF SUCTION HOSE AND ACCESSORIES FOR ELECTRIC MODELS - Optional	
Part #	Description
381137D	PVC CRUSHPROOF SUCTION HOSE ASSEMBLY, 1.5"(38mm) x 10'(3m), FOR 1.5" CAMLOCK INTAKE
381141	CRUSHPROOF HOSE ONLY Ø1.5"(38mm) (SOLD PER FOOT)
381199	HOSE CUFF Ø1.5"(38mm) -GREY PVC
381229	CAMLOCK PART C, 1.5"(38mm) FEMALE ADAPTOR w/SHANK FOR 1.5"(38mm) HOSE, ALUMINUM w/BRASS CAM LEVERS

Ø2" PVC CRUSHPROOF SUCTION HOSE AND ACCESSORIES FOR ELECTRIC MODELS - Optional	
Part #	Description
500131	PVC CRUSHPROOF SUCTION HOSE ASSEMBLY Ø2"(50mm)x15'(4.5m) FOR Ø2"(50mm) CAMLOCK INTAKE
500140	CRUSHPROOF HOSE ONLY Ø2"(50mm) (SOLD PER FOOT)
500137	HOSE CUFF Ø2"(50mm) -GREY PVC
500163	CAMLOCK PART C, 2"(50mm) FEMALE ADAPTOR w/SHANK FOR 2"(50mm) HOSE, ALUMINUM

Ø1.5" PVC CRUSHPROOF SUCTION HOSE AND ACCESSORIES FOR PNEUMATIC MODELS - Optional	
Part #	Description
381136B	CRUSHPROOF HOSE ASSEMBLY Ø1.5"(38mm)x15'(4.5m) FOR 2"(50mm) HOSE BARB
381141	CRUSHPROOF HOSE ONLY Ø1.5"(38mm) (SOLD PER FOOT)
381199	HOSE CUFF Ø1.5"(38mm) -GREY PVC
381202	HOSE CUFF EXPANDER Ø1.5"(38mm)HOSE TO Ø2"(50mm)TUBE -GREY PVC
381138G	PVC CRUSHPROOF SUCTION HOSE ASSEMBLY Ø1.5"(38mm)x15'(4.5m) FOR Ø2"(50mm) CAMLOCK INTAKE
500163	CAMLOCK PART C, 2"(50mm) FEMALE ADAPTOR w/SHANK FOR 2"(50mm) HOSE, ALUMINUM

Ø2" PVC CRUSHPROOF SUCTION HOSE AND ACCESSORIES FOR PNEUMATIC MODELS - Optional	
Part #	Description
500134	PVC CRUSHPROOF SUCTION HOSE ASSEMBLY Ø2"(50mm)x15'(4.5m) FOR Ø2"(50mm) HOSE BARB
500140	CRUSHPROOF HOSE ONLY Ø2"(50mm) (SOLD PER FOOT)
500137	HOSE CUFF Ø2"(50mm) -GREY PVC

Ø0.5" AIR SUPPLY HOSE AND ACCESSORIES - Optional	
Part #	Description
211789B	AIR SUPPLY HOSE ASSEMBLY STANDARD TYPE Ø0.5"(12.7mm)x25'(7.5m)WITH CHICAGO TYPE FITTING ON BOTH ENDS
211790B	AIR SUPPLY HOSE ASSEMBLY STANDARD TYPE Ø0.5"(12.7mm)x50'(7.5m)W/CHICAGO TYPE FITTING ON BOTH ENDS
211785	AIR SUPPLY HOSE ONLY STANDARD TYPE (RED) Ø0.5"(12.7mm) (SOLD BY FOOT)
212664	UNIVERSAL HOSE COUPLING QUICK (CHICAGO/KING TYPE) WITH 0.5"(12.7mm) FEMALE NPT

211788	FITTING FOR STANDARD TYPE AIR HOSE Ø.5"(Ø12.7mm)MALE NPT THREAD x Ø.5"(Ø12.7mm)HOSE BARB -BRASS
213802	FERRULE FOR STANDARD 0.5" (12.7mm) AIR SUPPLY HOSE (FERRULE ID 0.875"), BRASS

Ø0.75" AIR SUPPLY HOSE AND ACCESSORIES - Optional

Part #	Description
214671B	AIR SUPPLY HOSE ASSEMBLY STANDARD TYPE Ø0.75"(19mm)x25'(7.5m) WITH CHICAGO TYPE FITTING ON BOTH ENDS
214672B	AIR SUPPLY HOSE ASSEMBLY STANDARD TYPE Ø0.75"(19mm)x50'(15m) WITH CHICAGO TYPE FITTING ON BOTH ENDS
211785B	AIR SUPPLY HOSE ONLY STANDARD TYPE (RED) Ø0.75"(19mm)(SOLD BY FOOT)
214338	UNIVERSAL HOSE COUPLING QUICK (CHICAGO/KING TYPE) WITH 0.75"(19mm) FEMALE NPT THREAD
214660	FITTING FOR STANDARD TYPE AIR HOSE, Ø.75"(19mm) MALE NPT THREAD x Ø.75"(19mm) HOSE BARB -BRASS
214662	FERRULE FOR STANDARD 0.75"(19mm) AIR SUPPLY HOSE (FERRULE 1.150"(29.2mm)ID) -BRASS

Ø1" AIR SUPPLY HOSE AND ACCESSORIES - Optional

Part #	Description
214675B	AIR SUPPLY HOSE ASSEMBLY STANDARD TYPE Ø1"(25.4mm)x25'(7.5m)WITH CHICAGO TYPE FITTING ON BOTH ENDS
214676B	AIR SUPPLY HOSE ASSEMBLY STANDARD TYPE Ø1"(25.4mm)x50'(15m)WITH CHICAGO TYPE FITTING ON BOTH ENDS
211785C	AIR SUPPLY HOSE ONLY STANDARD TYPE (RED) Ø1"(25.4mm) (SOLD BY FOOT)
214339	UNIVERSAL HOSE COUPLING QUICK (CHICAGO/KING TYPE) WITH 1"(25.4mm) FEMALE NPT THREAD
213971	FITTING FOR STANDARD TYPE AIR HOSE Ø1"(25.4mm)MALE NPT THREAD x Ø1"(25.4mm) HOSE BARB, BRASS
214664	FERRULE FOR STANDARD 1"(25.4mm) AIR SUPPLY HOSE (FERRULE 1.375"(34.9mm)ID) -BRASS