


CLEANING MACHINES FOR UNCLASSIFIED (GENERAL PURPOSE) AREAS

All the electrical components are certified by an NRTL such as UL, CSA or ETL



Characteristics

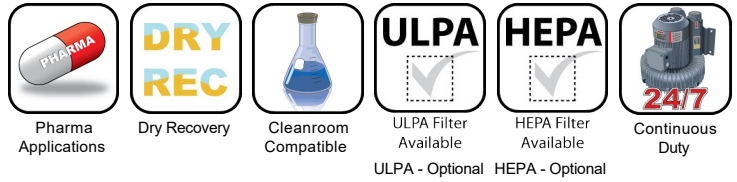

- HEPA filter with an efficiency of 99.995% at 0.3 micron. Tested IEST-RP-CC001. H14 by MPPS method as per EN 1822 and OSHA compliant. All of our HEPA vacuum systems are aerosol leak tested before leaving our facility - optional
- ULPA filter with an efficiency of 99.999% at 0.12 micron. Filtration efficiency of 99.9995% at 0.18 micron. Tested IEST-RP-CC001. U15 by MPPS method as per EN 1822. All of our ULPA vacuum systems are aerosol leak tested before leaving our facility - optional
- Cleanroom compatible with ISO Class 4 (former Class 10)
- Designed to be attached to process machines and for general cleanup in the Food industry
- Can also be used for the recovery of tablets in the Pharmaceutical industry
- Continuous duty single phase or 3-phase motor mounted vertically
- Includes disposable filter bags
- Available in a fixed or mobile unit
- For dry recovery only
- Available in stainless steel, white powder coated or stainless steel & white powder coated versions
- Vertical mounting for areas with space constraints
- 4 wheels for easy maneuverability

Specifications

CD-1500 CR (PFB) SERIES	111574A1	111574A2	111574A3	111574A4	111578A1	111578A2
Model Name	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - P/C & S/S	CD-1500 CR (PFB) - STAINLESS STEEL	CD-1500 CR (PFB) - STAINLESS STEEL
Type (Powerhead)	Electric	Electric	Electric	Electric	Electric	Electric
TEFC Motor	Yes	Yes	Yes	Yes	Yes	Yes
Tension	460 V	230 V	120 V	230 V	460 V	230 V
Frequency	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
Phase	Three	Three	Single	Single	Three	Three
Wattage	850 W	850 W	850 W	850 W	850 W	850 W
Power	1.1 HP	1.1 HP	1.1 HP	1.1 HP	1.1 HP	1.1 HP
Amperage	2.1 A	3.6 A	14 A	7 A	2.1 A	3.6 A
Air Flow	95 CFM	95 CFM	95 CFM	95 CFM	95 CFM	95 CFM
Vacuum Pressure	110 " H ₂ O	110 " H ₂ O	110 " H ₂ O	110 " H ₂ O	110 " H ₂ O	110 " H ₂ O
VRV Setting	70 " H ₂ O	70 " H ₂ O	70 " H ₂ O	70 " H ₂ O	70 " H ₂ O	70 " H ₂ O
Sound Level	64 dB(A)	64 dB(A)	64 dB(A)	64 dB(A)	64 dB(A)	64 dB(A)
Type of Power Outlet	Not Included	Not Included	Not Included	Not Included	Not Included	Not Included
Suction Inlet Port	2 "	2 "	2 "	2 "	2 "	2 "
Cart Type	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)	Carriage Base (CB)
Filter Cleaning	None	None	None	None	None	None
Dust Recovery Tank	5 Gal	5 Gal	5 Gal	5 Gal	5 Gal	5 Gal
Dry Recovery - Disposable Filter Bag	4 gal.	4 gal.	4 gal.	4 gal.	4 gal.	4 gal.
Length	13.5 "	13.5 "	13.5 "	13.5 "	13.5 "	13.5 "
Width	19.5 "	19.5 "	19.5 "	19.5 "	19.5 "	19.5 "
Height	37 "	37 "	37 "	37 "	37 "	37 "
Weight (Vacuum Only)	125 lb.	125 lb.	125 lb.	125 lb.	108 lb.	108 lb.
Cord Length	50 ft.	50 ft.	50 ft.	50 ft.	50 ft.	50 ft.
CD-1500 CR (PFB) SERIES	111578A3	111578A4				
Model Name	CD-1500 CR (PFB) - STAINLESS STEEL	CD-1500 CR (PFB) - STAINLESS STEEL				
Type (Powerhead)	Electric	Electric				
TEFC Motor	Yes	Yes				
Tension	120 V	230 V				
Frequency	60 Hz	60 Hz				
Phase	Single	Single				

Wattage	850 W	850 W
Power	1.1 HP	1.1 HP
Amperage	14 A	7 A
Air Flow	95 CFM	95 CFM
Vacuum Pressure	110 " H ₂ O	110 " H ₂ O
VRV Setting	70 " H ₂ O	70 " H ₂ O
Sound Level	64 dB(A)	64 dB(A)
Type of Power Outlet	Not Included	Not Included
Suction Inlet Port	2 "	2 "
Cart Type	Carriage Base (CB)	Carriage Base (CB)
Filter Cleaning	None	None
Dust Recovery Tank	5 Gal	5 Gal
Dry Recovery - Disposable Filter Bag	4 gal.	4 gal.
Length	13.5 "	13.5 "
Width	19.5 "	19.5 "
Height	37 "	37 "
Weight (Vacuum Only)	108 lb.	108 lb.
Cord Length	50 ft.	50 ft.

Please note that specifications are subject to change without notice

Use only recommended tools & accessories



Clear Polyliner Recovery Bags - Included



Disposable Filter Bag - Included



Tools and Accessories (Toolkit 4B) - Optional