



Complies with NFPA 77 "Recommended Practice on Static Electricity"



Applicable requirements :
Standard(s) for Electric Vacuum Cleaning Machines and Blower Cleaners (UL-1017)

Characteristics



Three Motors



HEPA -
Included



High Filtration
Efficiency Unit



Dry Recovery



Detachable
Tank



SS 304



SD Accessories
- Included



- Complies with NFPA 652 paragraph 8.4.2.2.1.7 and NFPA 654 paragraph 8.4.3.7 (1) to (7)
- Very powerful machine capable of working with large diameter suction hoses up to 70 mm. Perfect for Food industry, machine shops, Plastics industry, Ceramics industry, printing, textiles, heavy clean-up, etc.
- 3 motors (individual). 1, 2 or 3 motors can be used at one time
- HEPA Filter with a minimum efficiency of 99.97% at 0.3 micron - included
- Includes a conductive star shaped main filter
- Manual Filter Shaker (MFS) system
- Filter chamber and recovery tank made of stainless steel Type 304
- Detachable recovery tank (DT) for easy disposal of recovered materials
- Sight glass installed on recovery tank
- Optional front mounted floor tool, 28" (71 cm), is available for larger surface areas
- Includes a complete static dissipative tool kit
- Conductive wheels

Specifications


TV-200 / TV-200S (DT) MFS HEPA ORDLOC-652	112060A-652	112062A-652
Model Name	TV-200 (DT) MFS HEPA ORDLOC-652	TV-200S (DT) MFS HEPA ORDLOC-652
Type (Powerhead)	Electric	Electric
Tension	120 V	120 V
Frequency	60 Hz	60 Hz
Phase	Single	Single
Wattage	2400 W	2400 W
Power	3.2 HP	3.2 HP
Amperage	15.8 A	15.8 A
Air Flow	270 CFM	270 CFM
Vacuum Pressure	71.5 " H ₂ O	71.5 " H ₂ O
Sound Level	70 dB(A)	70 dB(A)
Type of Power Outlet	20 Amps	20 Amps
Suction Inlet Port	70 mm	70 mm
Cart Type	Detachable Tank (DT)	Detachable Tank (DT)
Filter Cleaning	Manual Filter Shaker (MFS)	Manual Filter Shaker (MFS)
Filter Type	Star Shaped + HEPA	Star Shaped + HEPA
Filter Surface Area	21 ft ² + 10.8 ft ²	21 ft ² + 10.8 ft ²
Recovery Capacity (Dry)	16 Gal (60 L)	26 Gal (100 L)
Length	32 "	32 "
Width	26 "	26 "
Height	54.5 "	61.5 "
Weight (Vacuum Only)	143 lb.	154 lb.
Cord Length	30 ft.	30 ft.

Please note that specifications are subject to change without notice

Use only recommended tools & accessories



Side Mounted Manual Filter Shaker

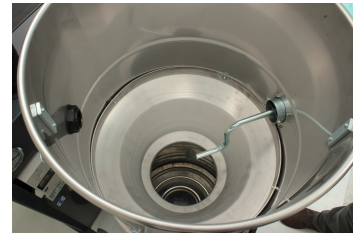

Side Mounted Manual Filter Shaker (Internal View)



Sight Glass on Recovery Tank



Tangential Suction Inlet, 70 mm, Aluminum



HEPA Filter Cartridge - Included



Conductive Star Shaped Filter with Cage for ORDLOC 652 - Included



Detachable Recovery Tank for easy emptying



Ø2" (Ø50 mm) Static Conductive Tool Kit - Included



Independent Control for each motor. Pressure Gage and Filter Blockage Indicator